


LIGHTING THE FUTURE

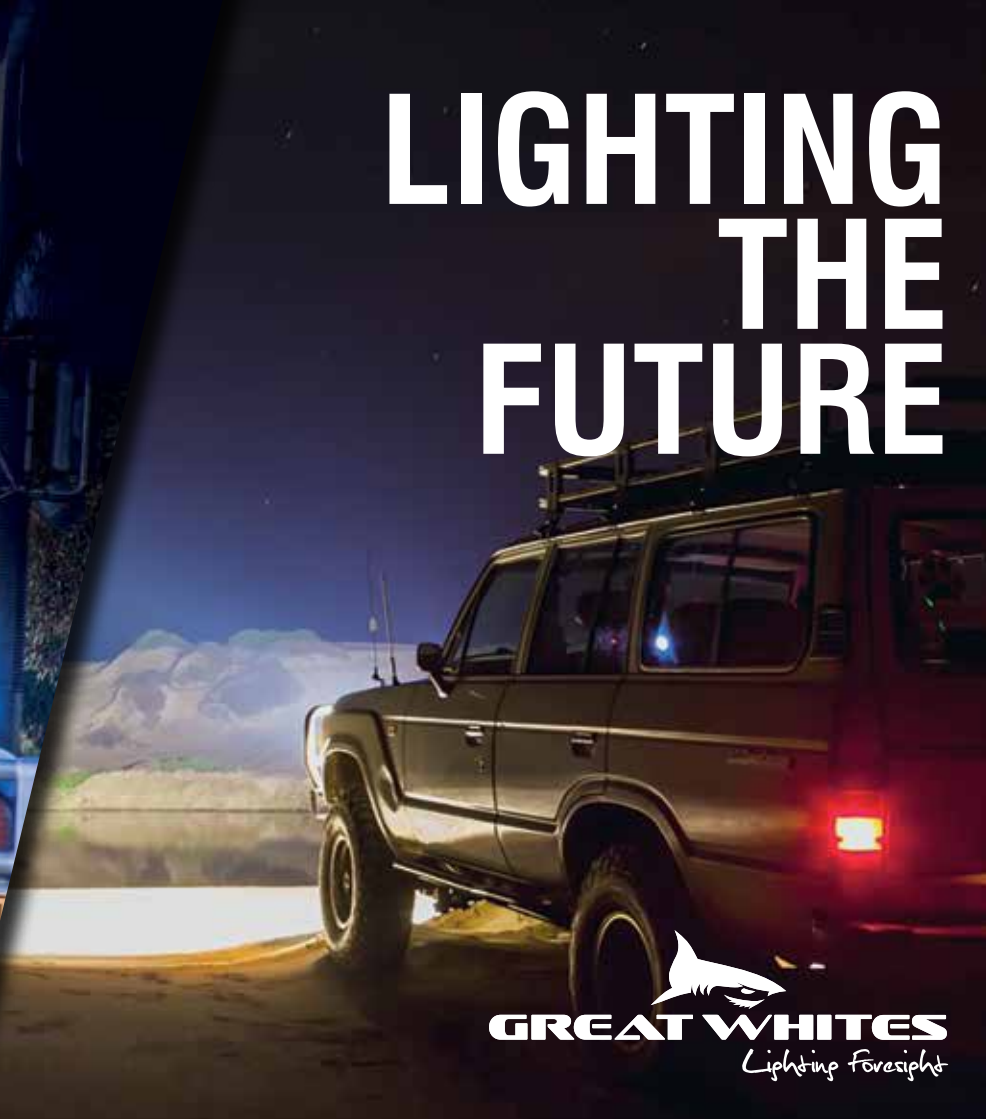


GREAT WHITES
Lighting Foresight

GREAT WHITES DIRECT REPLACEMENT LED HIGH/LOW HEADLIGHT INSERT WITH PARK LIGHT

LED 7" SEALED BEAM HIGH/LOW HEADLIGHT INSERT WITH PARK LIGHT **GEN2**

Effective Lumens: 2070
Raw Lumens: 3835
Amperage: 4.5A

Input Voltage: 9-32V
Weight: 1.3kg
Overall Height: 176.8mm / 6.96in
Depth: 90mm / 3.54in

LED Type:
High Beam: CREE XML x 2
Low Beam: Philips Altilon C2 x 1
 Philips Altilon C4 x 1
Park Light: Philips Luxeon 3014 x 30

Part No. GWF5005

WHITER & BRIGHTER

Greater volume of effective light output delivering a better light form on the road ahead.

REDUCING EYE STRAIN

The colour spectrum of LED is closer to that of sunlight which reduces eye strain. LEDs spread a crisp light ahead of the vehicle, enabling excellent peripheral vision.

LONGEVITY

50,000+ hour operating life

INSTANT ON

No warm up period

WATERPROOF

Up to 3m (IP69K rated)

SHOCKPROOF & VIBRATION DAMPENED

Rated to 21Grms

RF RATED

CISPR 25, Class 3 Rated to ensure that they don't introduce RF noise into electronics/radios, enabling unrestricted critical communication.



BUILT TO LAST

Polycarbonate lens and tough alloy composite housing (Corrosion Resistant).

5 YEAR WARRANTY

Conditions apply, see our website for more information.

EASY FITMENT

Suits OE Headlight Housing

INTEGRATED ELECTRONIC THERMAL MANAGEMENT

(ETM) to regulate heat levels to prolong the lifespan of the LED by engaging PWM.

PULSE WIDTH MODULATION

(PWM) integrated circuitry flashes the LED faster than the human eye can see for reduced heat and prolonged LED life.



GREAT WHITES DAYTIME RUNNING LIGHTS

4 LED 12-24V DAYTIME RUNNING LIGHT KIT

Effective Lumens:	247	Input Voltage:	10-30VDC
Raw Lumens:	380	Weight:	0.22kg each
LED Type:	Philips Luxeon-C LED	Length:	126.6mm / 4.98in
Amperage:	0.5A @12V	Height:	24.4mm / 0.96in
Wattage:	6W	Depth:	54mm / 2.12in

Part No. GWF1023

GEN2

- Suits both positive and negative switching vehicles.
- 8 x quality Philips LEDs (4 in each light).
- 2 DRL's per kit.
- Ready to install bracket.
- Includes complete wiring harness.
- Automatic dimming when park lights are turned on.
- 50,000+ hour operating life.
- Instant on. No warm up period.
- Can be mounted horizontally only.
- Waterproof Up to 3m (IP69K rated).
- Shockproof & Vibration Dampened rated to 21Grms.
- CISPR 25, Class 1 Rated to ensure that they don't introduce RF noise into electronics/radios, enabling clearer communication.
- 5 Year Warranty. Conditions apply, see our website for more information.





GREAT WHITES DRIVING LIGHTS FEATURES & BENEFITS

WHITER & BRIGHTER

Greater volume of effective light output delivering a better light form on the road ahead.

REDUCING EYE STRAIN

The colour spectrum of LED is closer to that of sunlight which reduces eye strain. LEDs spread a crisp light ahead of the vehicle, enabling excellent peripheral vision.

LONGEVITY

The 50,000+ hour operating life of an LED Driving Light is a more cost effective option than the 2,500 hour life of an HID driving light.

INSTANT ON

No warm up period

WATERPROOF

Gen2: IP69K | Gen1: IP68

SHOCKPROOF & VIBRATION DAMPENED

Gen2: Rated to 21Grms | Gen1: Rated to 15.6Grms

RF RATED

Gen2 Great Whites are CISPR 25, Class 3 Rated to ensure that they don't introduce RF noise into electronics/radios, enabling unrestricted communication.

BUILT TO LAST

Polycarbonate lens and tough alloy composite housing (Corrosion Resistant).

SECURING YOUR INVESTMENT

Features unique added security bolts to reduce the likelihood of theft (Excludes Twin Bar and 9 LED Low Mount Bar).



5 YEAR WARRANTY

Conditions apply, see our website for more information.

LATEST LED TECHNOLOGY

Cutting edge LED technology delivers both distance and spread of light in every individual LED to create the combination lights. The single LED lights have been specifically designed for applications requiring distance and not spread.

PULSE WIDTH MODULATION

(PWM) integrated circuitry flashes the LED faster than the human eye can see for reduced heat and prolonged LED life.

INTEGRATED ELECTRONIC THERMAL MANAGEMENT

(ETM) to regulate heat levels to prolong the lifespan of the LED by engaging PWM.

CHANNELLED HEAT SINK

Designed for superior heat dissipation to prolong the lifespan of the LEDs.

ALL GREAT WHITES BARS BOAST EXTRUDED 6061 ALUMINIUM HOUSING

For ultimate durability and protection

ENVIRONMENTALLY SEALED FLY LEAD WITH DEUTSCH CONNECTORS



220 LONG DISTANCE ROUND DRIVING LIGHT

Effective Lumens:	2783	Input Voltage:	9-32VDC
Raw Lumens:	5961	Weight:	4.75kg
LED Type:	Luminus CBT-140	Height:	243mm / 9.56in
Amperage:	7.9A @12V	Length:	240mm / 9.44in
Wattage:	94.8	Depth:	220mm / 8.66in

Part No. GWR100013

GEN2

220 24 LED ROUND DRIVING LIGHT

Effective Lumens:	10386	Input Voltage:	9-32VDC
Raw Lumens:	13440	Weight:	6.55kg
LED Type:	Cree XP-G2	Height:	243mm / 9.56in
Amperage:	11.04 @12V	Length:	240mm / 9.44in
Wattage:	132.48W	Depth:	220mm / 8.66in

Part No. GWR5243

GEN2





170 LONG DISTANCE ROUND DRIVING LIGHT

Effective Lumens:	1672	Input Voltage:	9-32VDC
Raw Lumens:	3693	Weight:	2.66kg
LED Type:	Luminus CBT-90	Height:	190mm / 7.48in
Amperage:	5.48A @12V	Length:	187.5mm / 7.38in
Wattage:	65.76W	Depth:	136mm / 5.35in

Part No. GWR60013

GEN2



170 18 LED ROUND DRIVING LIGHT

Effective Lumens:	7034	Input Voltage:	9-32VDC
Raw Lumens:	10080	Weight:	3.51kg
LED Type:	Cree XP-G2	Height:	190mm / 7.48in
Amperage:	8.24A @12V	Length:	187.5mm / 7.38in
Wattage:	98.88W	Depth:	136mm / 5.35in

Part No. GWR5183

GEN2





18 LED 4X4 WIDE ANGLE ROUND DRIVING LIGHT

Effective Lumens:	6,375	Input Voltage:	9-32VDC
Raw Lumens:	8,874	Weight:	2.8kg
LED Type:	5W Cree XPG	Height:	183mm / 7.20in
Amperage:	6.25 @ 12V	Length:	170mm / 6.69in
Wattage:	75W	Depth:	114mm / 4.48in

The Great Whites 4X4 Wide Angle offers a greater spread of light for serious off-road action. The elliptical beam pattern produces an oval beam pattern with a wider amount of light covering a medium distance.

Part No. GWR5182



Voted 2013 Best
New Aftermarket
Product -



4WD



170 12 LED ROUND DRIVING LIGHT

Effective Lumens:	4883	Input Voltage:	9-32VDC
Raw Lumens:	6720	Weight:	3.51kg
LED Type:	Cree XP-G2	Height:	190mm / 7.48in
Amperage:	5.58A @12V	Length:	187.5mm / 7.38in
Wattage:	66.96W	Depth:	136mm / 5.35in

Part No. GWR5123

GEN2



170 9 LED ROUND DRIVING LIGHT

Effective Lumens:	3840	Input Voltage:	9-32VDC
Raw Lumens:	5040	Weight:	3.51kg
LED Type:	Cree XP-G2	Height:	190mm / 7.48in
Amperage:	4.18A @12V	Length:	187.5mm / 7.38in
Wattage:	50.16W	Depth:	136mm / 5.35in

Part No. GWR5093

GEN2





120 LONG DISTANCE ROUND DRIVING LIGHT

Effective Lumens:	1363	Input Voltage:	9-32VDC
Raw Lumens:	2725	Weight:	1.03kg
LED Type:	Luminus SST-90	Height:	126mm / 4.96in
Amperage:	2.22A @12V	Length:	137mm / 5.39in
Wattage:	26.64W	Depth:	94mm / 3.70in

Part No. GWR30013

GEN2



120 7 LED ROUND DRIVING LIGHT

Effective Lumens:	2688	Input Voltage:	9-32VDC
Raw Lumens:	3920	Weight:	1.3kg
LED Type:	Cree XP-G2	Height:	126mm / 4.96in
Amperage:	2.8A @12V	Length:	137mm / 5.39in
Wattage:	33.6W	Depth:	94mm / 3.70in

Part No. GWR5073

GEN2





90 BULL BAR HALO LIGHT

Effective Lumens:	688	Input Voltage:	9-32VDC
Raw Lumens:	1052	Weight:	0.69KG
LED Type:	Cree XML-2	Diameter:	95mm / 3.74in
Amperage:	0.7A @12V	Height:	95mm / 3.74in
Wattage:	8.4W	Depth:	110mm / 4.33in

Part No. GWR10013

GEN2





24 LED TWIN BAR DRIVING LIGHT

GEN²

Effective Lumens:	9363	Input Voltage:	9-32VDC
Raw Lumens:	13440	Weight:	3.92kg
LED Type:	Cree XP-G2	Length:	985mm / 38.77in
Amperage:	10.72A @12V	Height:	65mm / 2.55in
Wattage:	128.64W	Depth:	62mm / 2.44in

Part No. GWT5243



Great Whites logo illuminates separately delivering greater impact.
Visit our website for more information.

18 LED BAR DRIVING LIGHT

GEN²

Effective Lumens:	6824	Input Voltage:	9-32VDC
Raw Lumens:	10080	Weight:	3.11kg
LED Type:	Cree XP-G2	Length:	622mm / 24.48in
Amperage:	7.74A @12V	Height:	75mm / 2.95in
Wattage:	92.88W	Depth:	62mm / 2.44in

Part No. GWB5183





12 LED BAR DRIVING LIGHT

Effective Lumens:	4623	Input Voltage:	9-32VDC
Raw Lumens:	6720	Weight:	2.2kg
LED Type:	Cree XP-G2	Length:	426mm / 16.77in
Amperage:	5.14A @12V	Height:	75mm / 2.95in
Wattage:	61.68W	Depth:	62mm / 2.44in

Part No. GWB5123



GEN2

9 LED BAR DRIVING LIGHT

Effective Lumens:	3431	Input Voltage:	9-32VDC
Raw Lumens:	5040	Weight:	1.75kg
LED Type:	Cree XP-G2	Length:	353mm / 13.89in
Amperage:	3.88A @12V	Height:	75mm / 2.95in
Wattage:	46.56W	Depth:	62mm / 2.44in

Part No. GWB5093



GEN2

9 LED LOW MOUNT BAR DRIVING LIGHT

Effective Lumens:	3431	Input Voltage:	9-32VDC
Raw Lumens:	5040	Weight:	1.26kg
LED Type:	Cree XP-G2	Length:	313mm / 12.32in
Amperage:	3.88A @12V	Height:	65mm / 2.55in
Wattage:	46.56W	Depth:	62mm / 2.44in

Part No. GWB5093LM





18 LED CHROME BAR DRIVING LIGHT

Effective Lumens:	6,375	Input Voltage:	9-32VDC
Raw Lumens:	8,874	Weight:	3.26kg
LED Type:	5W Cree XPG	Length:	640mm / 25.19in
Amperage:	6.25 @ 12V	Height:	60mm (+Bracket) / 2.36in
Wattage:	75W	Depth:	79mm / 3.11in

Part No. GWB5181CHROME

12 LED CHROME BAR DRIVING LIGHT

Effective Lumens:	4,250	Input Voltage:	9-32VDC
Raw Lumens:	5,916	Weight:	2.36kg
LED Type:	5W Cree XPG	Length:	448mm / 17.63in
Amperage:	4.16 @ 12V	Height:	60mm (+Bracket) / 2.36in
Wattage:	50W	Depth:	79mm / 3.11in

Part No. GWB5121CHROME

18 LED CHROME ROUND DRIVING LIGHT

Effective Lumens:	6,375	Input Voltage:	9-32VDC
Raw Lumens:	8,874	Weight:	2.8kg
LED Type:	5W Cree XPG	Height:	183mm / 7.2in
Amperage:	6.25 @ 12V	Length:	170mm / 6.69in
Wattage:	75W	Depth:	114mm / 4.48in

Part No. GWR5181CHROME





36 LED DUAL BAR DRIVING LIGHT

Effective Lumens:	12970	Input Voltage:	9-32VDC
Raw Lumens:	20160	Weight:	4.71kg
LED Type:	Cree XP-G2	Length:	570mm / 22.44in
Amperage:	13.96A @12V	Height:	105mm / 4.13in
Wattage:	167.52W	Depth:	85mm / 3.34in

Part No. GWD5363



GEN2

24 LED DUAL BAR DRIVING LIGHT

Effective Lumens:	9144	Input Voltage:	9-32VDC
Raw Lumens:	13440	Weight:	3.33kg
LED Type:	Cree XP-G2	Length:	410mm / 16.14in
Amperage:	9.52A @12V	Height:	105mm / 4.13in
Wattage:	114W	Depth:	85mm / 3.34in

Part No. GWD5243



GEN2

18 LED DUAL BAR DRIVING LIGHT

Effective Lumens:	7091	Input Voltage:	9-32VDC
Raw Lumens:	10080	Weight:	2.71KG
LED Type:	Cree XP-G2	Length:	330mm / 12.99in
Amperage:	7.34A @12V	Height:	105mm / 4.13in
Wattage:	88.08W	Depth:	85mm / 3.34in

Part No. GWD5183





ILLUMINATED ROCKER SWITCH

On/Off Rocker Switch, Blue Illumination. To suit 12V and 24V applications. 20amp rating @ 12V.

GWA0014

WIRING HARNESS

Automatically detects positive or negative switching headlight systems. Plug and play H4 adaptor plugs that can be removed to suit other headlight connector types. Kit contains switch, pre-wired relay holder, fuse holder with 20A fuse, positive/negative circuit built into harness and detailed fitting instructions. Harness cable length suitable for most passenger vehicles, 4X4s, 12V trucks and 24V vehicles.

12 Volt - Part No. GWA0007

24 Volt - Part No. GWA0008

10MM, 8MM & 6MM LOCK NUTS

Reduce the risk of having your driving lights stolen! These nuts and bolts feature special security heads requiring a special keyed socket to remove. Each kit contains two nuts and one installation device.

10mm - Part No. GWA0002

To suit 120 and 170 Round LED Driving Lights

8mm - Part No. GWA0009

To suit 90 Bull Bar and all Bar LED Driving Lights excluding 9 LED Low Mount (Part No. GWB5093LM)

6mm - Part No. GWA0010

To suit 9 LED Low Mount (Part No. GWB5093LM)

ANGLE BRACKET

To suit Great Whites Bar LED Driving Lights. Excludes 9 LED Low Mount (Part No. GWB5093LM) and LED Twin Bar (Part No. GWT5243)

GWA0011



DRIVING LIGHT NUMBER PLATE MOUNTING BRACKET

Designed to suit Great Whites 9 LED Low Mount Bar Lights. Add lighting without unnecessary hardware.

Specifications & Dimensions

- 5mm Aluminium construction
- Black powder coat finish
- Holds any 9 or 12 LED Great Whites Bar



Length: 367mm / 14.44in
Height: 119mm / 4.68in
Depth: 48mm / 1.88in

Part No. GWA0001

Added Features

- Installs behind number plate.
- Easy no drill installation.
- Suitable for both cars and 4X4s.
- Features multiple fixing points.
- Designed to fit slimline and regular number plates.

POLYCARBONATE LENS COVERS

To suit all Great Whites 170 Round LED Driving Lights. Shatterproof Polycarbonate protects from rock and debris impact. Fully gasketed for added dust and water protection.



Clear (Part No. GWA0003)

Added protection for your Great Whites.



Blue (Part No. GWA0004)

Helps penetrate salt spray when beach driving and also helps penetrate snow.



Yellow (Part No. GWA0005)

Helps penetrate fog.



Red (Part No. GWA0006)

Helps penetrate dust.



OUTSHINE, OUTLAST, OUTPLAY.



FOLLOW US
ON FACEBOOK



greatwhites.com.au // greatwhites.co.nz

SCAN HERE
TO VIEW
FULL
RANGE OF
GREAT WHITES

